

MUTCD NUMBER None

CODE <u>SG44-2</u> Lt. & Rt.

Typical TOD Sign Layout - 2 Lines

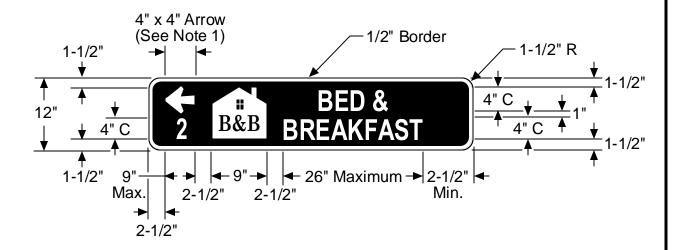

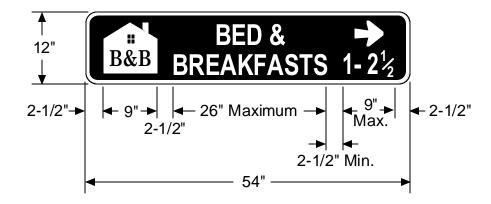

Notes:

- 1. For arrow dimensions, see Typical TOD Sign Arrow sheet.
- 2. Distances should be to the nearest whole mile, but the nearest 1/4 mile may be used to avoid any confusion to the motorist.
- 3. Letter size for fractions, when used, is 2"C.
- 4. All trailblazer signs should be in place, before this sign is placed on the State highway.
- 5. All signs on State highways shall be installed per Caltrans Standard Plans RS1 and RS2, Roadside Sign Typical Installation Details No. 1 and No. 2. Except that the minimum distance from the bottom of the sign to the ground shall be 7'-2" for the top sign, 6'-1" for the second sign and 5'-0" for the bottom sign.

COLORS BORDER, SYMBOL & LEGEND - WHITE (REFLECTIVE) BACKGROUND - BLUE (REFLECTIVE)

CHIEF, OFFICE OF SIGNS AND DELINEATION	DATE	REVISION	REVISION